


<i>Install ROCKEY4 Smart dongle</i>	<u>1</u>
<i>Update ROCKEY4 Smart dongle</i>	<u>5</u>
<i>Remove an existing normal TEMA licence</i>	<u>8</u>

Install ROCKEY4 Smart dongle


Install TEMA with the configuration code labelled on the dongle.
Follow the on screen instructions.

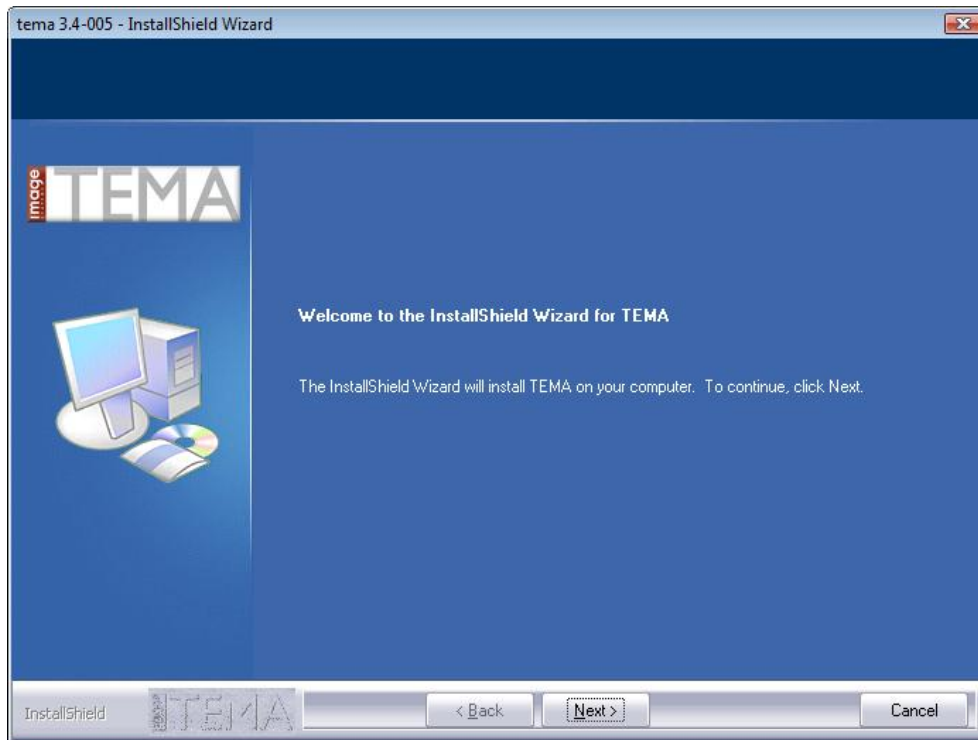

.....click Next




.....click Next

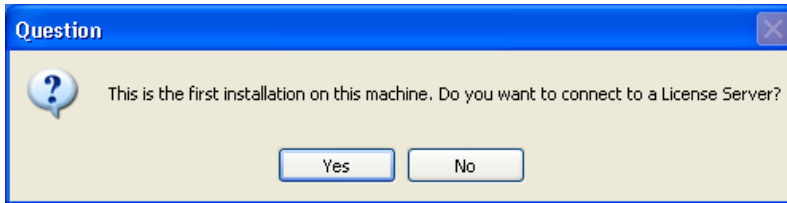


.....click **No**


Type in your configuration code, labelled on the dongle.

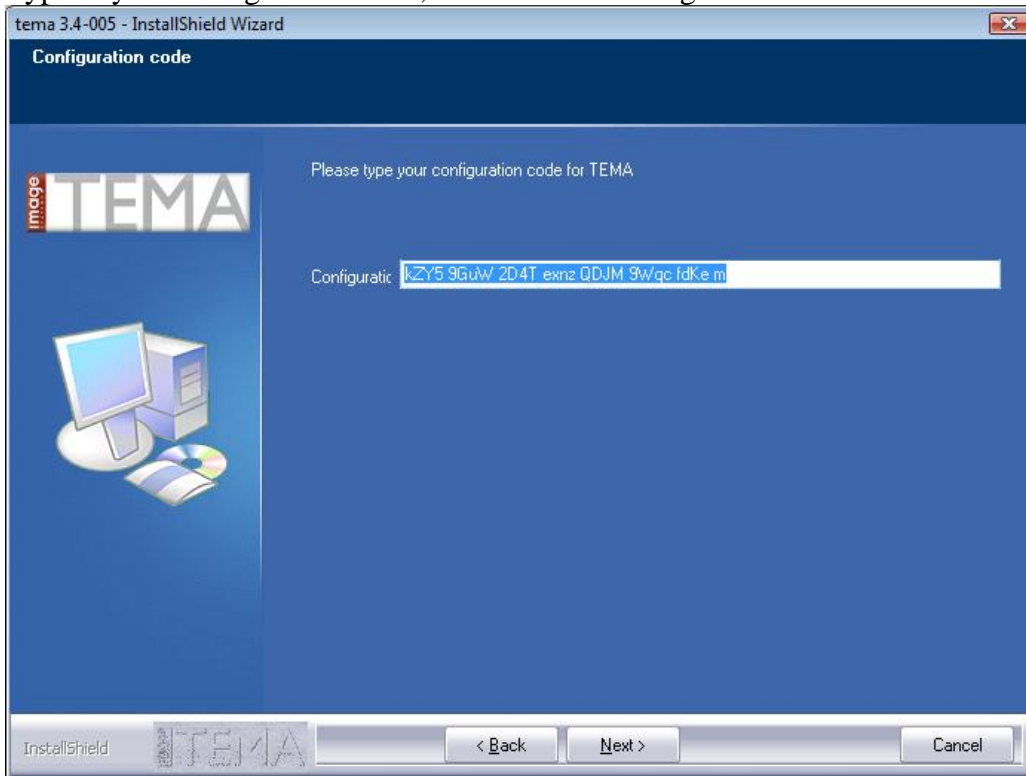


.....click **Next**

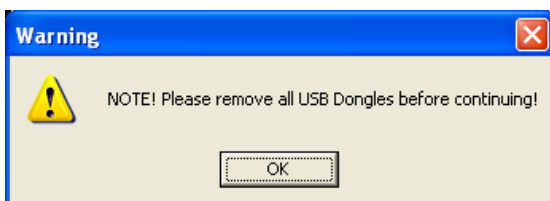


Remove all USB dongles & Click OK.

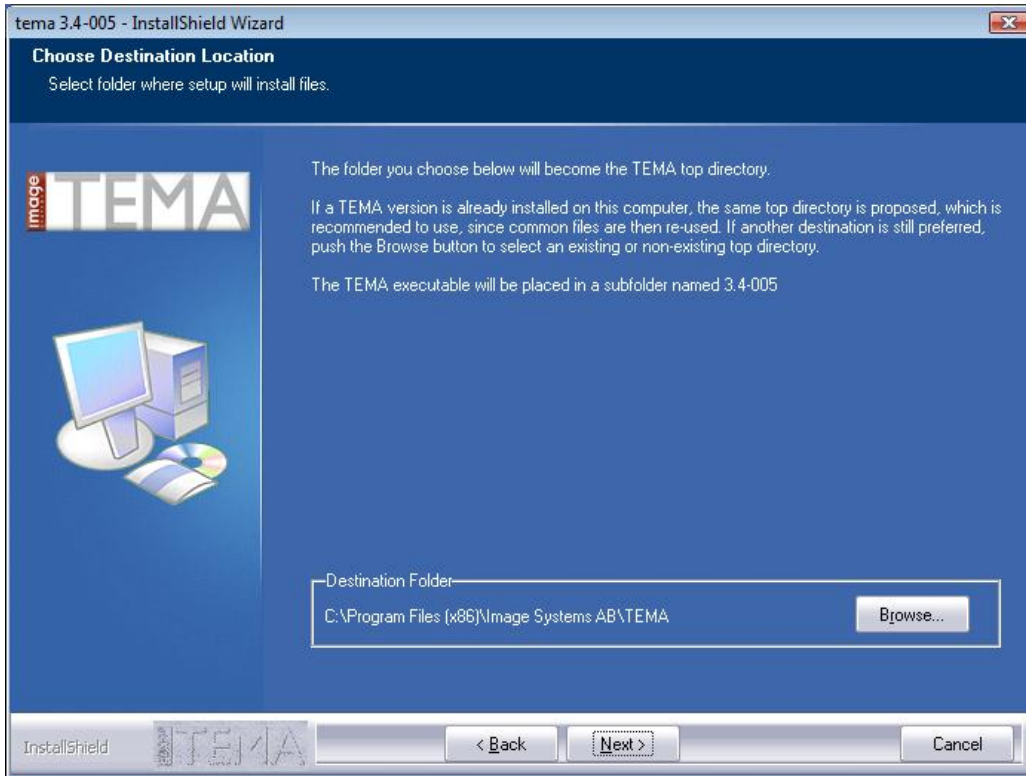

.....click **Next**

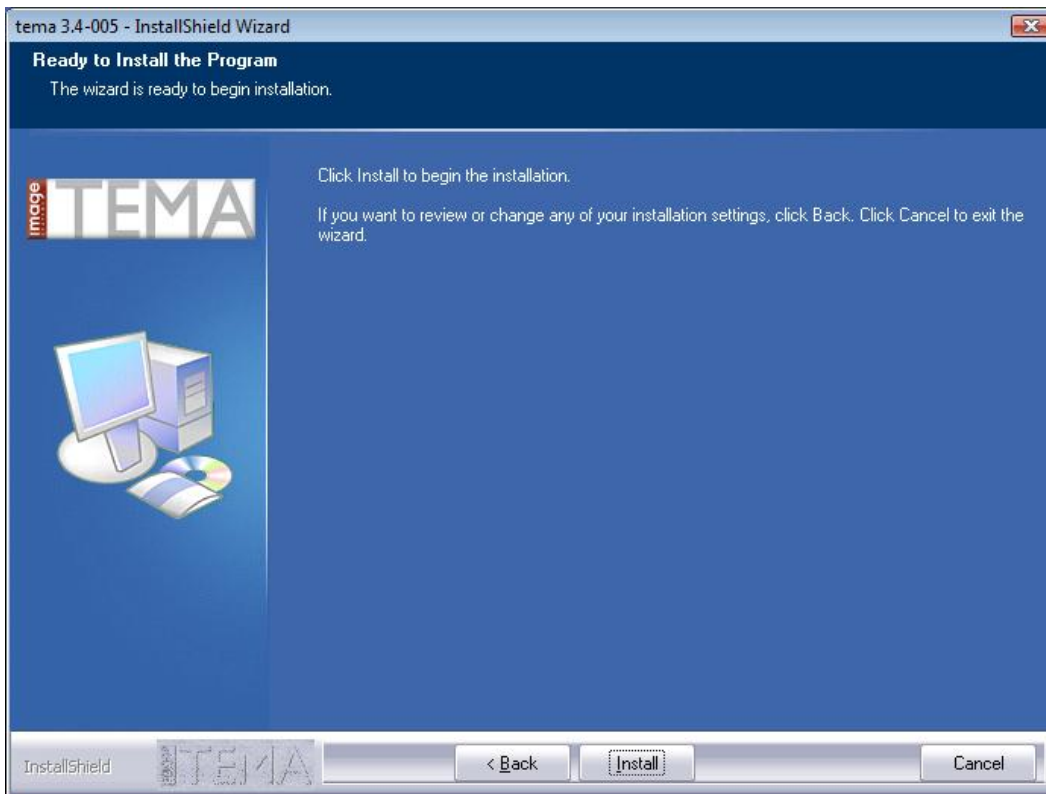

.....click **Install**

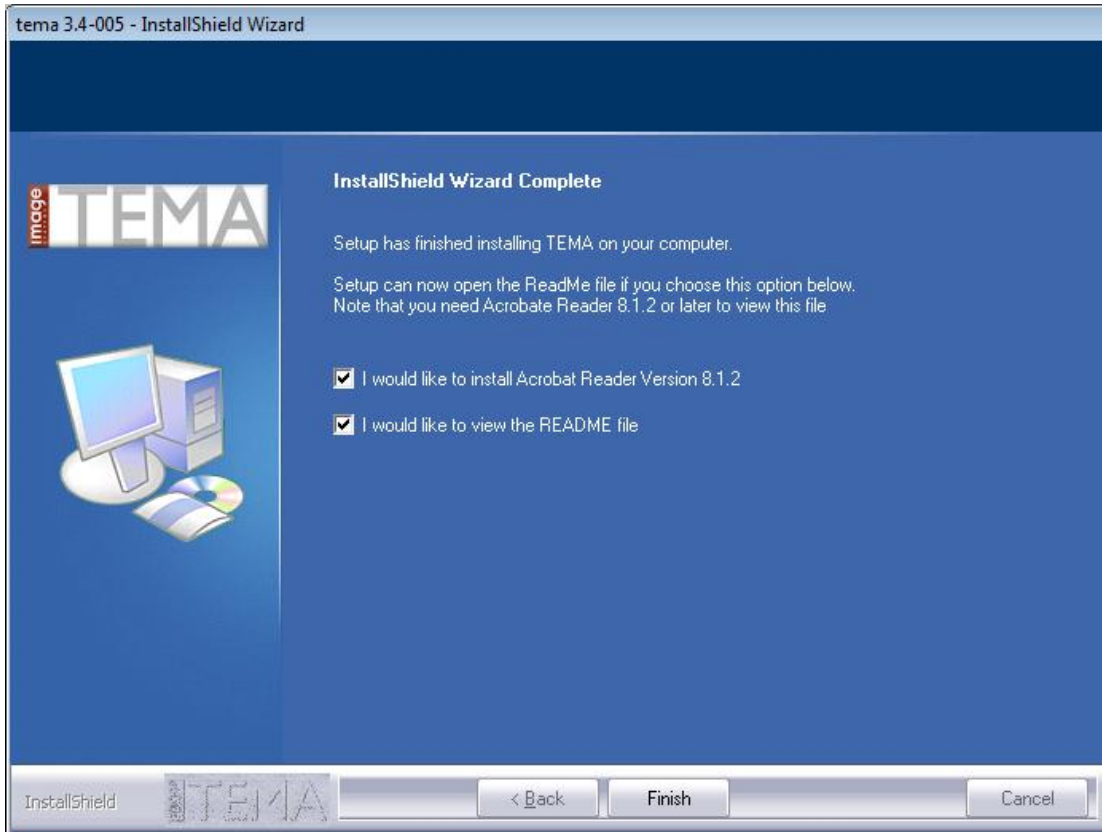


.....click **Finish**.


The **driverless** technique is applied to ROCKEY4 SMART to make the device **driverless** in all operating systems.

After installation, place the dongle in the USB port. Start TEMA.


This message appears if you start without the dongle in place. Click Exit & place the dongle in the USB port & start TEMA again.

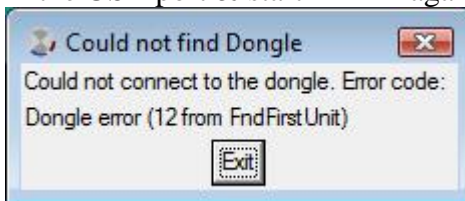

If you remove the dongle when you are running TEMA, this dialogue will appear, click close & place the dongle in the USB port again.

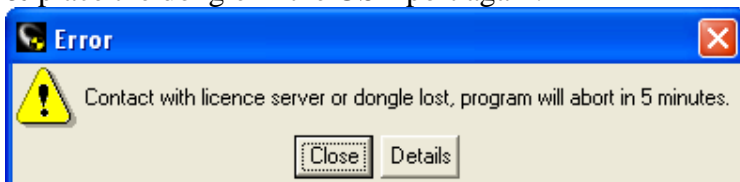


If TEMA can not contact the dongle it will be closed after 5 minutes. Click close in this dialogue & TEMA will be closed.

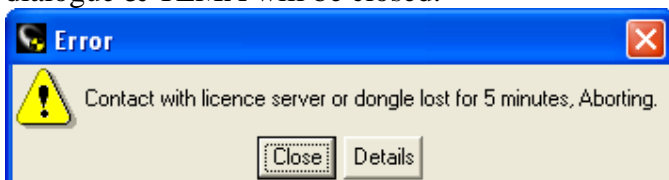


Update ROCKEY4 Smart dongle


When starting TEMA, this message will be displayed when the dongle license is invalid, expired etc.

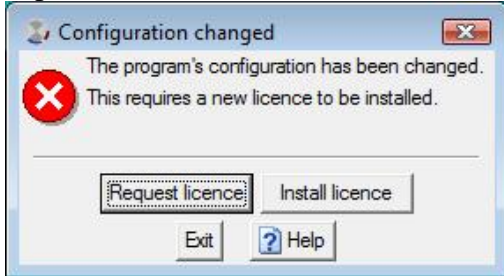

Click request licence.

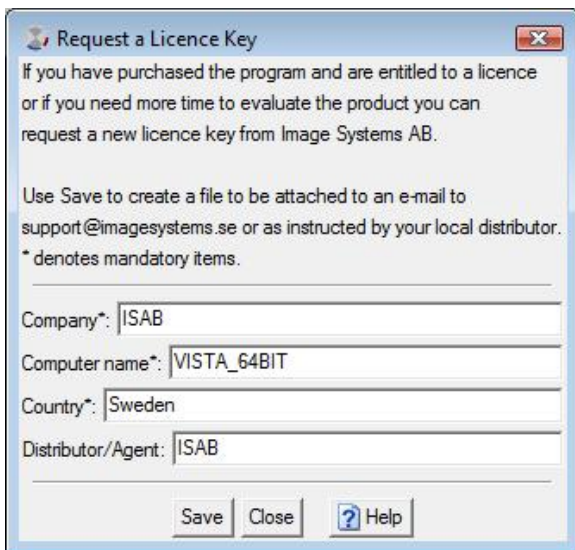


Type in your information & click Save.

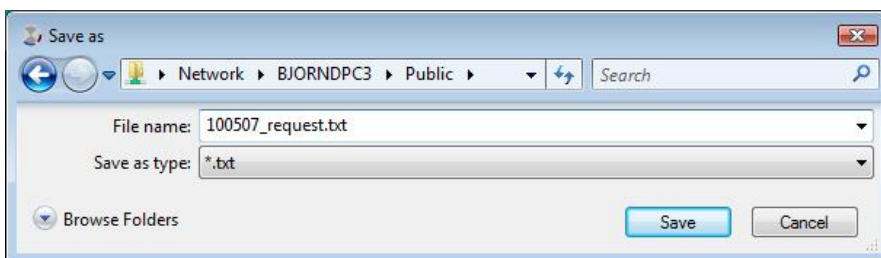

Click Save. Attach this file in e-mail & send it to licensing@imagesystems.se


We will create the new **licence.txt** & send it back back as soon as possible. Save **licence.txt** on your computer.

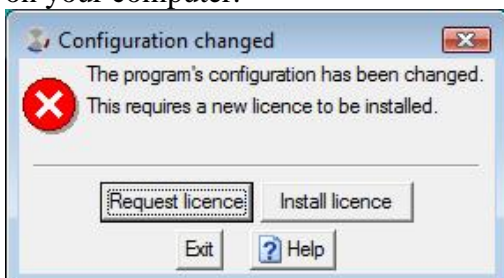


Click Install licence.



Click Load file.

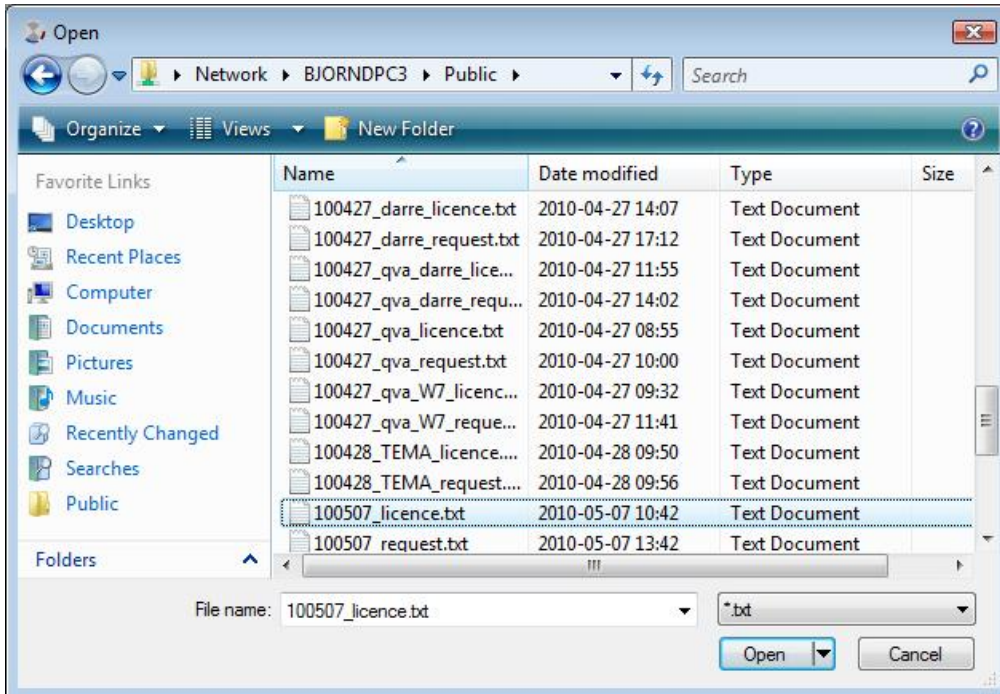

Browse to the folder where you saved the new licence.txt. Click open.

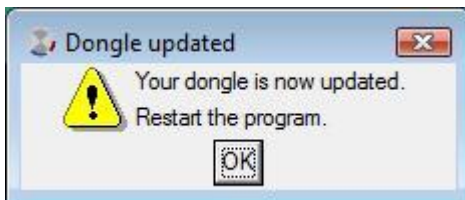


Click OK, restart TEMA. TEMA hopefully starts with the new licence installed.

It is also possible to request & install from the menu bar in TEMA:
Tools->License->Request or Install


When the code in the dongle is changed (new configuration or new max version) you can see all licence information (Expiry date, Configuration code, Max version & type of dongle) in the menu bar:

Help-> About TEMA.

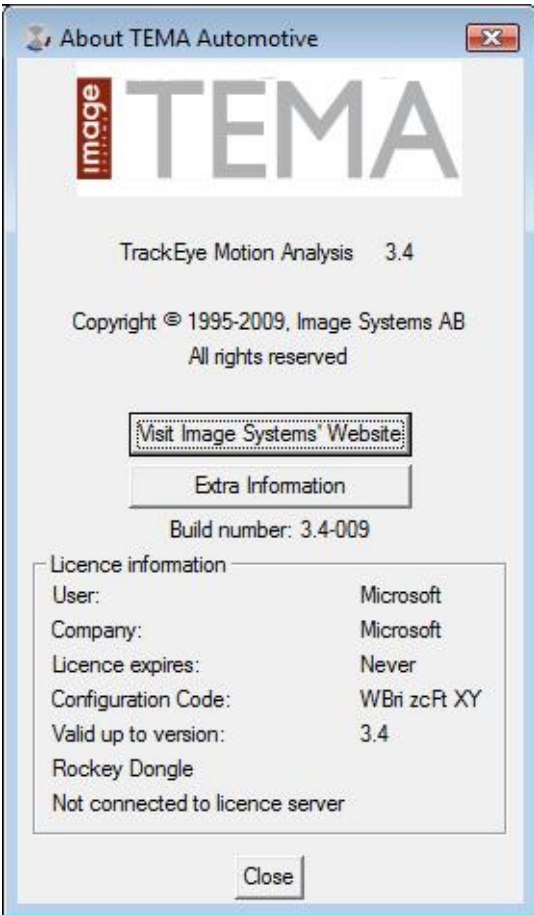

Remove an existing normal TEMA licence


In TEMA, Goto Tools->Licence->Remove

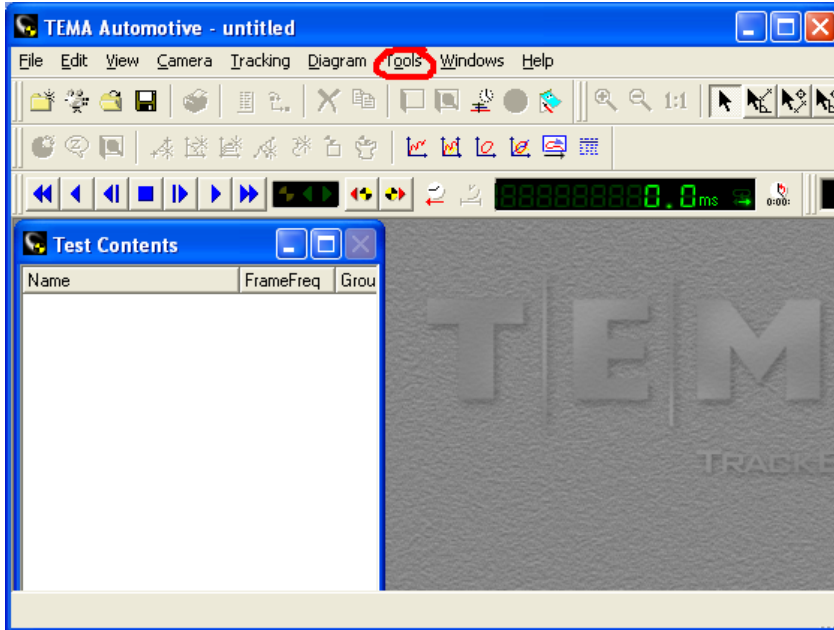

Click OK




Save the removed.txt

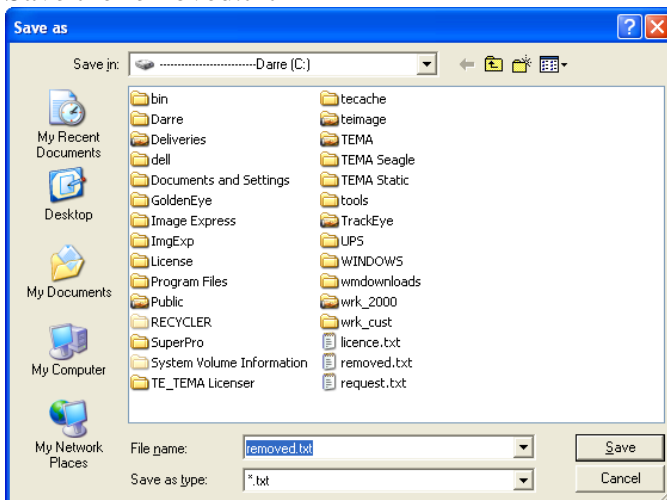

Click REMOVE



Click Exit

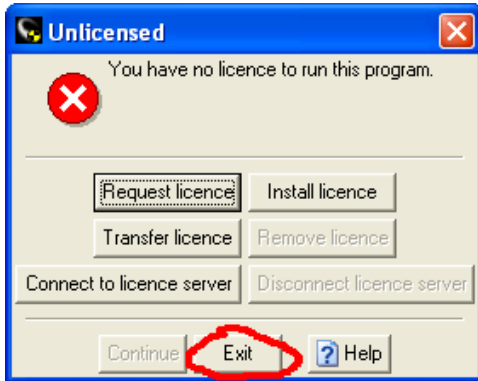

Send the removed.txt to licensing@imagesystems.se

If your next step is to Change to a Rockey4 Smart dongle solution, go to ["Install ROCKEY4Smart"](#).

Image Systems AB
Technical Support